


COVAL

vacuum managers

VACUOB

VBH / VBR

Vacuum lifting devices for wood

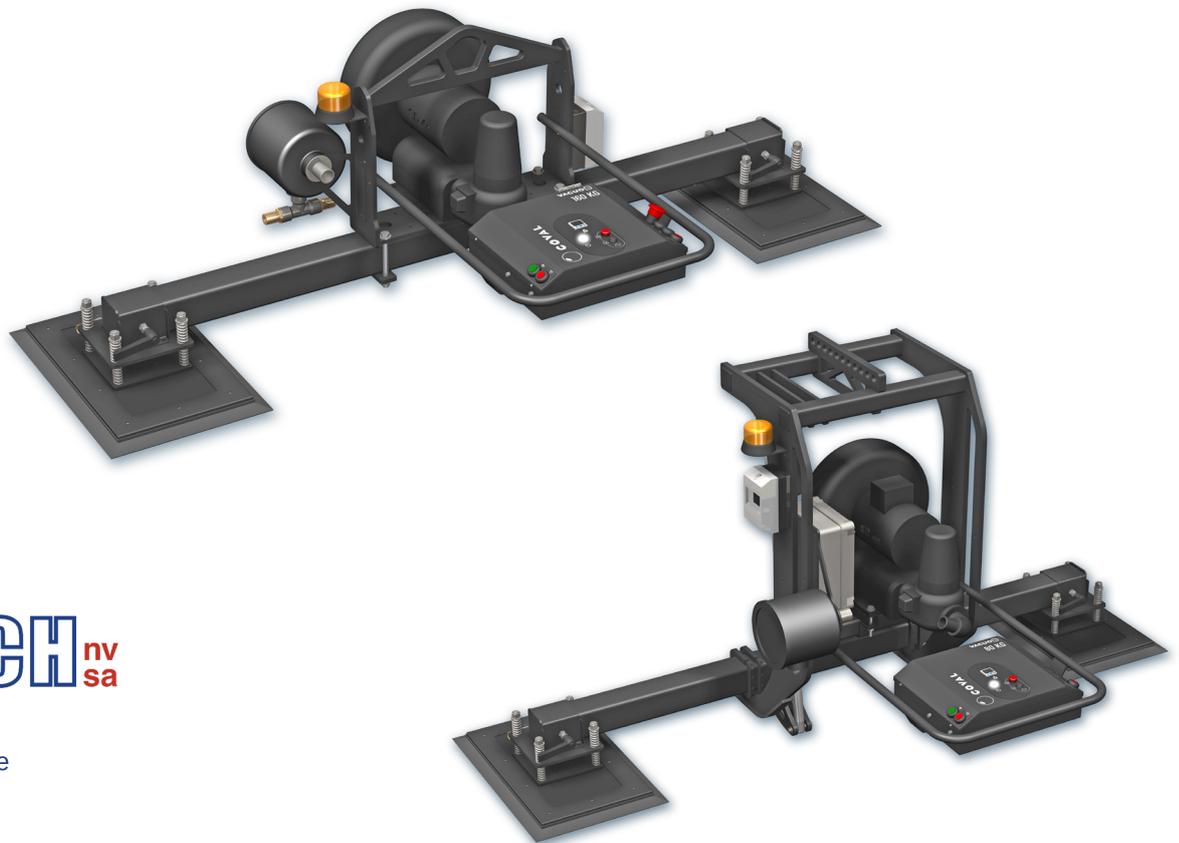

Vriesenrot 22
B-9200 Dendermonde
+32 52 40 95 70
info@tiltech.be
www.tiltech.be

ADVANCED VACUUM SOLUTIONS

www.coval.com

EN2

VACUO-B

Vacuum lifting devices for wood

Handling loads from 80 to 320 kg

For more than 35 years, COVAL - the vacuum handling experts specialized in heavy loads, an ISO 9001: V2015 certified company - has been designing and manufacturing a broad range of vacuum equipment, vacuum lifting devices and lifting tubes that can be adapted to your industrial context, help prevent MSDs and improve your productivity without sacrificing safety.

Our key strengths reside in our ability to provide advice, installation services, and operator training.

Bolstered by this extensive experience and our know-how on the vacuum handling market, COVAL is now offering you our full range of VACUO-B vacuum lifting devices, which are dedicated to handling heavy loads from 80 to 320 kg such as wooden panels (chipboard, plywood..) and porous panels.

The VACUO-B line of vacuum lifting devices is COVAL's standard product addressing such needs as horizontal handling and 90° swivelling of porous loads by one single operator.

They are easy to use, benefit from outstanding reliability and all-round ruggedness, and are available in electric version. The VACUO-B vacuum lifting devices are equipped with a blower allowing to generate a high air flow and ensuring the grip of porous materials. Besides, in case of power failure, the handling of the loads is maintained thanks to the blower's flywheel.

The VACUO-B vacuum lifting devices are specifically designed for the following applications:



- Palletizing and depalletizing
- Feeding machinery
- Unloading conveyors

Advantages

- Fast and easy to implement
- Humanizes the most strenuous physical labour
- Productivity gains
- Loads can be handled by a single operator
- Will not cause any deterioration of handled loads
- Improves working conditions
- Easy to use
- Quick return on investment
- Complies with EC directives

Ergonomics

Using VACUO-B vacuum lifting devices allows you to improve working conditions by reducing operator's fatigue and accidents for all operations involving horizontal handling of porous panels weighing up to 320kg or 90° swivelling of panels weighing up to 250 kg.

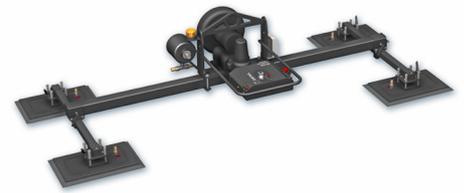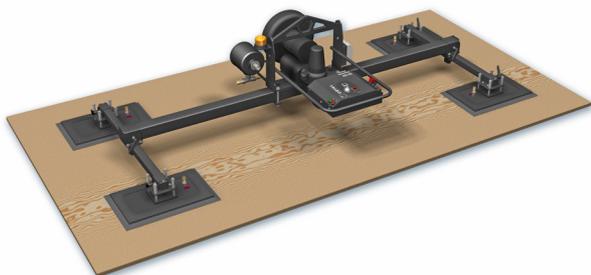

Industry-specific applications




Movements



Horizontal


VACUO^B VBH

SWL from 100 to 320 kg

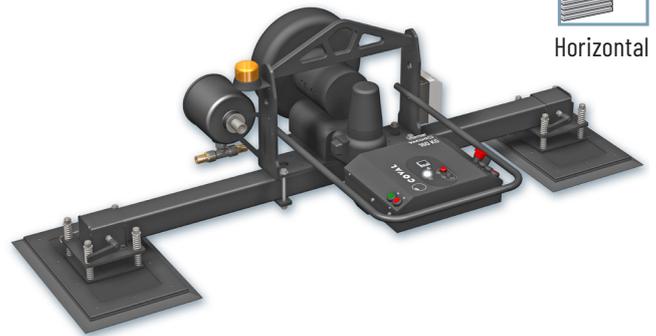

VACUO^B VBR

SWL from 80 to 250 kg

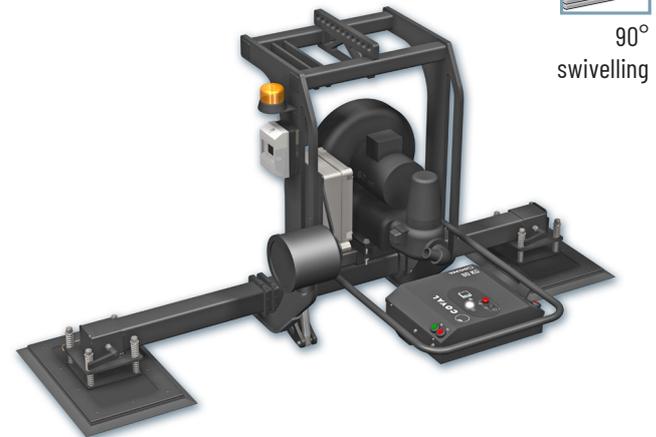

90°
swivelling

SAFETY

The VACUO-B line includes the following safety features:

- Flywheel blower allowing in case of power failure to maintain the vacuum in the suction cups, the time that the operator secures the station.
- Electronic colour display type vacuum switch indicating the vacuum level in suction cups
- Warning Alarm in case of power cut or drop of vacuum level
- Power on indicator
- 2 red "Release" buttons that force the user to use both hands

According to your applications and needs, additional features can be selected from the Option Packs.



COVAL vacuum lifting devices comply with the EU Machinery **2006/42/CE**, and Low voltage **2014/35/UE** directives as well as with European standard **EN 13155**.



VACUO-B

Vacuum lifting devices for wood

General information

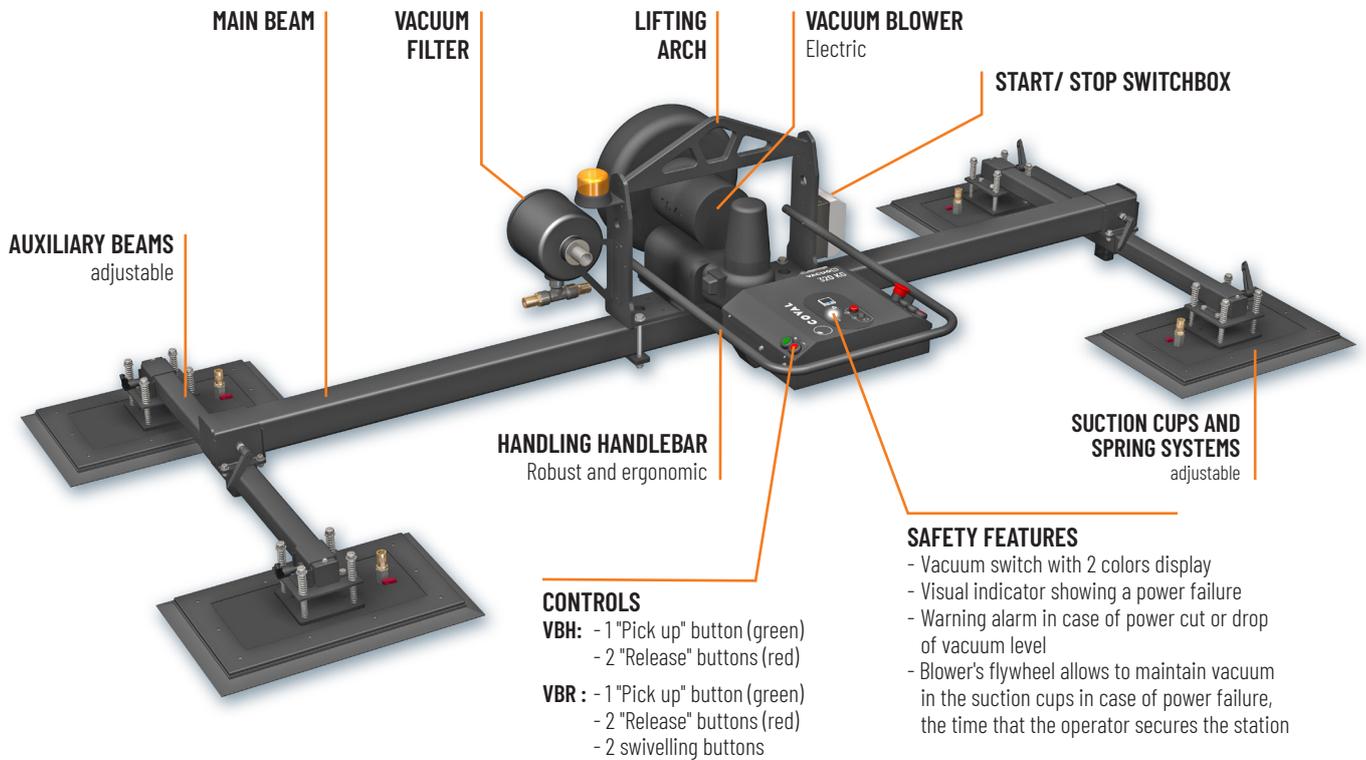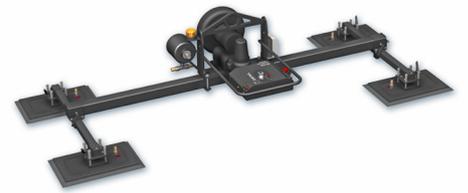

Power

The VACUO-B vacuum lifting devices are available in electric version for optimal integration in the handling workstation. The vacuum is generated by a dry rotary vane vacuum pump, flow rate: 150 m³/h.

- Available voltages: - Three-phase 230 V (2.35 A - 1.3 KW)
- Three-phase 400 V (1.35 A - 1.3 KW)
- VBR version: Swivelling by electric cylinder

General features

- Frame: machine-welded steel
- Beams: steel
- Clamps: steel
- Powder-coated epoxy paint for industrial environments

CUSTOM-MADE VERSIONS

Your business might sometimes bring you to situations for which our standard versions are not perfectly adapted to your needs. COVAL can provide custom-made solutions that meet your specifications, by integrating custom functions or by offering tailor-made vacuum lifting devices (adjusted in size or with a different type of suction cup).

ACCESSORIES (on request request)

We have several accessories available on request request that will enable you to further integrate your VACUO-B in your facility:

- Coiled power cable
- Coiled cable for integration of hoist controls, etc.

Number of suction cups

The VACUO-B vacuum lifting devices are available in versions equipped with 2, 3, 4 or 6 suction cups in order to adjust the dimensions and thickness of the sheet metal to be handled and ensure an optimal grip without any risk of deforming or damaging the loads.

VBH



2 suction cups

3 suction cups

4 suction cups

VBR



2 suction cups

3 suction cups




4 suction cups

6 suction cups

VACUO-B VBH

Horizontal vacuum lifting devices

Horizontal handling of loads from 100 to 320 kg

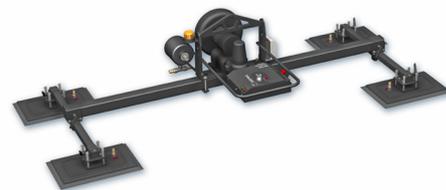

The VACUO-B VBH line of vacuum lifting devices is COVAL's standard product addressing such needs as handling horizontal handling of porous panels by one single operator. They are easy to use and stand out due to their reliability and all-round ruggedness.

VBH VACUO-B vacuum lifting devices are specifically designed for the following applications:

- Palletizing and depalletizing
- Feeding machinery
- Unloading conveyors

Industry-specific applications



Movements



Horizontal

Lifting capacity	Max. load (kg)					
Model	100	150	200	250	300	350
VACUO-B VBH1	100					
VACUO-B VBH1.6	150	150				
VACUO-B VBH2.5	200	200	200			
VACUO-B VBH3.2	250	250	250	250		

PACK PK2-

Powerful warning light to warn the operator of a power failure.

PACK PK1-


Control panel including the Pick up / Release buttons as well as safety features.

1/4 TURN VALVE

For applications requiring frequent format changes, the VACUO-B lifting devices can be equipped with 1/4 turn shutoff valves on each suction cup.

SPRING SYSTEMS

To guarantee that all the suction cups come into contact with the load, VACUO-B units are equipped with spring systems as standard:

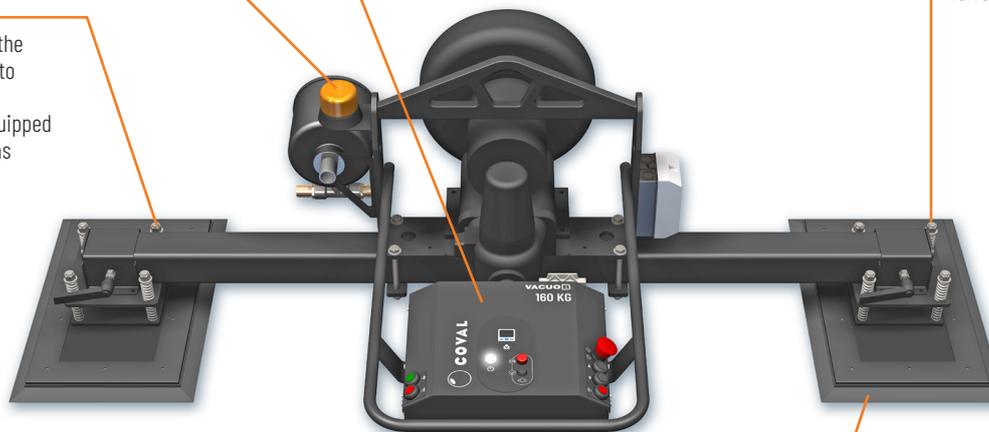

SUCTION CUPS

570 X 370 mm suction cups equipped with a removable Nitrile seal.



ON REQUEST

Direction of the suction cups
On standard version, the suction cups are oriented perpendicular to the beam on which they are mounted.
(Main beam or auxiliary one depending on the number of suction cups). On request one, the suction cups can be oriented parallel to the beam.



Standard orientation:
Perpendicular



On request orientation:
Parallel

OPTIONS: INTEGRATION OF ELECTRIC HOIST CONTROLS



Controls of the electric hoist and/or of the bridge crane are integrated in the control panel or in the removable control box (low-voltage control, 48 V max.):

PK-1

- 1 "emergency stop" button
- 1 "up" button
- 1 "down" button

PK-2

- 1 "emergency stop" button
- 1 "up" button
- 1 "down" button
- 1 "left" button
- 1 "right" button

PK-3

- 1 "emergency stop" button
- 1 "up" button
- 1 "down" button
- 1 "left" button
- 1 "right" button
- 1 "forward" button
- 1 "reverse" button

VACUO-B VBH


Horizontal vacuum lifting devices

Horizontal handling of loads from 100 to 320 kg



		OPTION PACKS			
	VB H 5	E2	3	X	PK 1 X
TYPE	Horizontal P1	POWER	230 V Tri E1	1/4 TURN VALVE	HOIST CONTROL
			400 V Tri E2	X Without valve	X No hoist control
				V With valve	1 Integrated hoist control Up/Down
SWL	100 kg 1	NUMBER OF SUCTION CUPS	2 Suction cups 2	VACUO-B CONTROL	2 Integrated hoist control Up/Down + Left/Right
	160 kg 1.6		3 Suction cups 3	Control buttons on handlebar 1	3 Integrated hoist control Up/Down + Bridge crane Left/Right Forward/Reverse
	250 kg 2.5		4 Suction cups 4	Same as 1 + visual alarm via a warning light 2	
	320 kg 3.2				

See available configurations on the table list below.

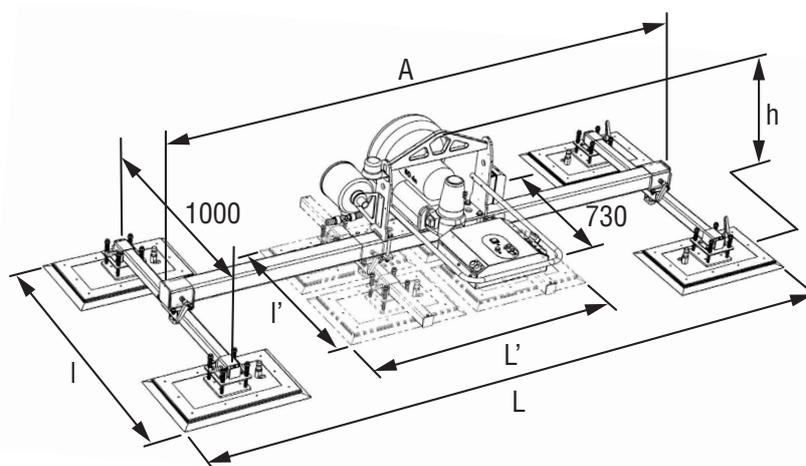

2-suction cups VACUO-B VBH

Max. load (kg)	Length of main beam (A)	No. of auxiliary beams	Dimensions of the device (L x l)	Handled mini. format (L' x I')	Height (h)	Spring system	Weight	Part no.*
100	1700 mm	-	1970 x 940 mm	1000 x 600 mm	630 mm	RSC2	120 Kg	VBH1E2X2DX17PK1X
	2500 mm		2770 x 940 mm				130 Kg	VBH1E2X2DX25PK1X
	3000 mm		3270 x 940 mm				136 Kg	VBH1E2X2DX30PK1X
160	1700 mm	-	1970 x 940 mm	1000 x 600 mm	630 mm	RSC2	120 Kg	VBH1.6E2X2DX17PK1X
	2500 mm		2770 x 940 mm				130 Kg	VBH1.6E2X2DX25PK1X
	3000 mm		3270 x 940 mm				136 Kg	VBH1.6E2X2DX30PK1X

3-suction cups VACUO-B VBH

Max. load (kg)	Length of main beam (A)	No. of auxiliary beams	Dimensions of the device (L x l)	Handled mini. format (L' x I')	Height (h)	Spring system	Weight	Part no.*
250	1700 mm	-	1970 x 940 mm	1200 x 600 mm	630 mm	RSC2	134 Kg	VBH2.5E2X3DX17PK1X
	2500 mm		2770 x 940 mm				144 Kg	VBH2.5E2X3DX25PK1X
	3000 mm		3270 x 940 mm				150 Kg	VBH2.5E2X3DX30PK1X

4-suction cups VACUO-B VBH

Max. load (kg)	Length of main beam (A)	No. of auxiliary beams	Dimensions of the device (L x l)	Handled mini. format (L' x I')	Height (h)	Spring system	Weight	Part no.*
320	1700 mm	2	2170 x 1270 mm	1200 x 800 mm	680 mm	RSC1	160 Kg	VBH3.2E2X4CX17PK1X
	2500 mm		2970 x 1270 mm				170 Kg	VBH3.2E2X4CX25PK1X
	3000 mm		3470 x 1270 mm				176 Kg	VBH3.2E2X4CX30PK1X

* Weight and part number are specified for VACUO-B VBH Electric 3-ph. 400 V, without 1/4 turn valve, with Pick up/Release controls on control panel, without hoist control integration option

VACUO-B VBR

90° rotating vacuum lifting devices

Handling loads from 80 to 250 kg



The VACUO-B VBR line of vacuum lifting devices is COVAL's standard product addressing such needs as handling and 90° swivelling of porous panels by one single operator. They are easy to use and stand out due to their reliability and all-round ruggedness.

VBR VACUO-B vacuum lifting devices are specifically designed for the following applications:

- Palletizing and depalletizing
- Feeding machinery
- Unloading conveyors

Industry-specific applications



Movements



90°
swivelling

Lifting capacity	Max. load. (kg)					
Model	80	120	160	200	240	280
VACUO-B VBR0.8	[Progressive bar chart showing capacity up to 80kg]					
VACUO-B VBR1.2	[Progressive bar chart showing capacity up to 120kg]					
VACUO-B VBR1.6	[Progressive bar chart showing capacity up to 160kg]					
VACUO-B VBR2.5	[Progressive bar chart showing capacity up to 250kg]					

PACK PK2-

Powerful warning light to warn the operator of a power failure.

90° SWIVELLING CYLINDER (electric)

1/4 TURN VALVE

For applications requiring frequent format changes, the VACUO-B lifting devices can be equipped with 1/4 turn shutoff valves on each suction cup.

SPRING SYSTEMS

To guarantee that all the suction cups come into contact with the load, VACUO-B units are equipped with spring systems as standard:

PACK PK1-

Control panel including the Pick up / Release buttons as well as safety features.

SUCTION CUPS

570 X 370 mm suction cups equipped with a removable Nitrile seal.

OPTIONS: INTEGRATION OF ELECTRIC HOIST CONTROLS

PK-1

Controls of the electric hoist are integrated in the removable control box (low-voltage control, 48 V max.):

- 1 "Emergency Stop" button
- 1 "Up" button
- 1 "Down" button

PK-2

Controls of the electric hoist + cart are integrated in the removable control box (low-voltage control, 48 V max.):


- 1 "Emergency Stop" button
- 1 "Up" button
- 1 "Down" button
- 1 "Left" button
- 1 "Right" button



VACUO-B VBR

90° rotating vacuum lifting devices

Handling loads from 80 to 250 kg

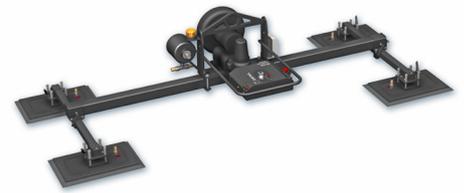

VB R 1.2


E2 - 4 - X - -

OPTION PACKS

PK 1 X

TYPE	POWER	1/4 TURN VALVE	VACUO-B CONTROL	HOIST CONTROL
90° rotating R	3-phase 230 V E1	X Without valve	Control buttons on removable control box (snappable onto handlebar) 1	X No hoist control
	3-phase 400 V E2	V With valve	Same as 3 + visual alarm via a warning light 2	1 Integrated hoist control Up/Down
SWL	NUMBER OF SUCTION CUPS			2 Integrated hoist control Up/Down + Left/Right
80 kg 0.8	2 Suction cups 2			
120 kg 1.2	3 Suction cups 3			
160 kg 1.6	4 Suction cups 4			
250 kg 2.5	6 Suction cups 6			

See available configurations on the table list below.

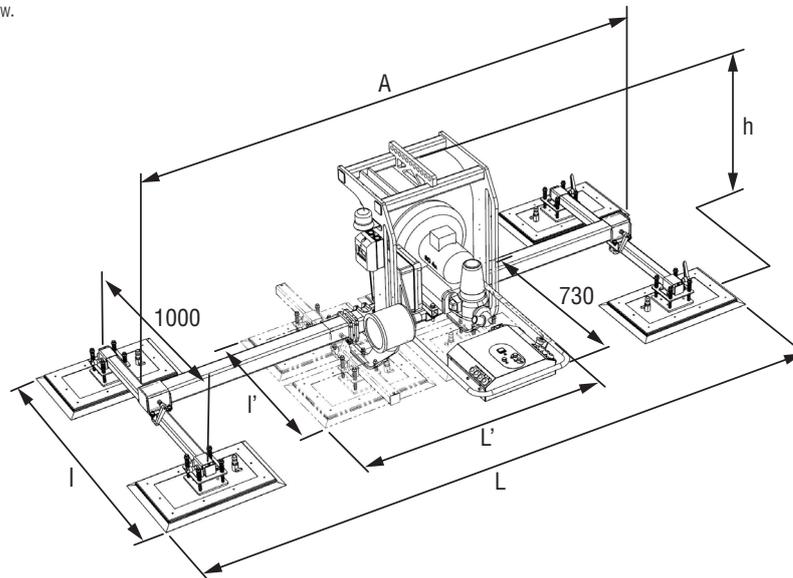

2-suction cups VACUO-B VBR

Max. load (kg)	Length of main beam (A)	No. of auxiliary beams	Dimensions of the device (L x l)	Handled mini. format (L' x l')	Height (h)	Spring system	Weight	Part no.*
80	1700 mm	-	1970 x 330 mm	1000 x 600 mm	1005 mm	RSC2	160 Kg	VBRO.8E2X2DX17PK1X
	2500 mm		2770 x 330 mm				170 Kg	VBRO.8E2X2DX25PK1X
	3000 mm		3270 x 330 mm				150 Kg	VBRO.8E2X2DX30PK1X

3-suction cups VACUO-B VBR

Max. load (kg)	Length of main beam (A)	No. of auxiliary beams	Dimensions of the device (L x l)	Handled mini. format (L' x l')	Height (h)	Spring system	Weight	Part no.*
120	1700 mm	-	1970 x 330 mm	1000 x 600 mm	1005 mm	RSC2	174 Kg	VBRI.2E2X3DX17PK1X
	2500 mm		2770 x 330 mm				184 Kg	VBRI.2E2X3DX25PK1X
	3000 mm		3270 x 330 mm				190 Kg	VBRI.2E2X3DX30PK1X

4-suction cups VACUO-B VBR

Max. load (kg)	Length of main beam (A)	No. of auxiliary beams	Dimensions of the device (L x l)	Handled mini. format (L' x l')	Height (h)	Spring system	Weight	Part no.*
160	1700 mm	2	2170 x 1680 mm	1200 x 800 mm	1050 mm	RSC1	200 Kg	VBRI.6E2X4CX17PK1X
	2500 mm		2970 x 1680 mm				210 Kg	VBRI.6E2X4CX25PK1X
	3000 mm		3470 x 1680 mm				216 Kg	VBRI.6E2X4CX30PK1X

6-suction cups VACUO-B VBR

Max. load (kg)	Length of main beam (A)	No. of auxiliary beams	Dimensions of the device (L x l)	Handled mini. format (L' x l')	Height (h)	Spring system	Weight	Part no.*
250	1700 mm	3	2170 x 1680 mm	1000 x 600 mm	1050 mm	RSC1	228 Kg	VBRI.2E2X6CX17PK1X
	2500 mm		2970 x 1680 mm				238 Kg	VBRI.2E2X6CX25PK1X
	3000 mm		3470 x 1680 mm				244 Kg	VBRI.2E2X6CX30PK1X

* Note: Weight and part number are specified for VACUO-B VBR Electric 3-ph. 400 V, without 1/4 turn valve, with Pick up/Release controls on control box, without hoist control integration option



COVAL
vacuum managers

vacuum
components



A TECHNOLOGICAL PARTNER ON A GLOBAL SCALE

Located in the South of France, COVAL SAS designs, produces, and markets high-performance vacuum components and systems for industrial applications in all sectors worldwide.

An ISO 9001: V2015 certified company, COVAL innovates globally in vacuum handling. Our optimized components integrate intelligent and reliable functionalities, adapt to your industrial context, and safely improve your productivity.

With a strong spirit of innovation and technological advancements, the COVAL team is now recognized as an expert in developing reliable, economical, and productive custom solutions.

COVAL's references are found in major industrial sectors such as packaging, food processing, automotive, plastics, aerospace, and robotics, where vacuum handling is crucial for efficiency and productivity.

COVAL markets its products and services worldwide through its subsidiaries and authorized distributor network. Always attentive to its customers, COVAL supports the implementation of its solutions with a continuous and attentive relationship.

Visit the following section on COVAL's website:
contacts > commercial network
to view the most current list.



COVAL S.A.S.
Head Office



COVAL INC.



COVAL IBERICA



COVAL ITALIA

Distributed by:



Vriesenrot 22
B-9200 Dendermonde
+32 52 40 95 70
info@tiltech.be
www.tiltech.be



Certified quality
management system

COVAL S.A.S.

Head Office
ZA Les Petits Champs
10 allée Jean-Baptiste Venturi
26120 Montélier, France
Phone: +33 (0)4 75 59 91 91
Fax: +33 (0)4 75 59 91 05

www.coval.com